



trivum SCW165-S


Article-Number: 700015

EAN: 4260393850408

trivum single speaker for ceiling and wall mounting was developed in order to achieve the highest possible efficiency factor combined with the clearest audio reproduction. Distortions and sound colorations are reduced to an absolute minimum resulting in a clear intelligibility.

The SCW speaker has a significantly reduced installation depth of only 80 mm.

The single speaker SCW165-S is the perfect complement to the trivum multiroom systems.

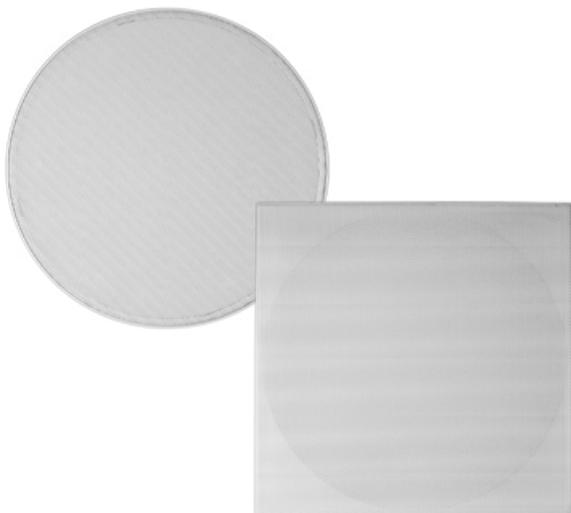

2x90W

Power

The SCW165-S has a high, short-term peak power capacity of 2x 90 watt.

92dB

Efficiency factor

With its efficiency factor of 92 dB/W the SCW165-S belongs to the market leaders in this size.

2x8Ω

Impedance

A high impedance of 8 ohm is very important for flush mount speakers since they are usually connected to long cables.



Tweeter Level

The SCW165-S has a tweeter level adjustment in order to adjust the sound to spacial and acoustical prerequisites.



Reproduction quality

The loudspeakers impress with clear reproduction and audibility due to the minimization of distortions and sound intelligibility.



Grills

The included round and square grills can be exchanged anytime without the need to remove or exchange the speakers.



Installation

Fast and easy installation in 3 steps:

- Cut out mounting hole
- Install cable and speaker
- Install the grill



Stereo

The SCW165-S is a stereo speaker. Therefore, it has two separate voice coils for the bass and two separate tweeters with likewise two audio crossovers.





Function

Speaker for ceiling and wall mounting.

Technical Data

Tweeter diameter	2x 20 mm silk dome
Tweeter mounting	-
Tweeter level switch	yes, 0 dB & -3 dB
Woofer diameter	165 mm
Impedance	2 x 8 Ω
Power capacity (peak)	2 x 90 W
Sensitivity	92 dB/W
Response -3 dB	59 Hz–20 kHz

Grills

Round grill (diameter)	233 mm
Square grill	232 x 232 mm
Magnetic grill fixing	yes

Dimensions

t1	2 mm
d1	224 mm
Ultra thin bezel	1 mm
Ultra shallow grill	3.5 mm
Installation depth (t ₂)	80 mm
Mounting diameter (d ₂)	202 mm
Net weight	1720 g

Frequency response

